




Адсорбционный осушитель GMP ADF-25 (26)

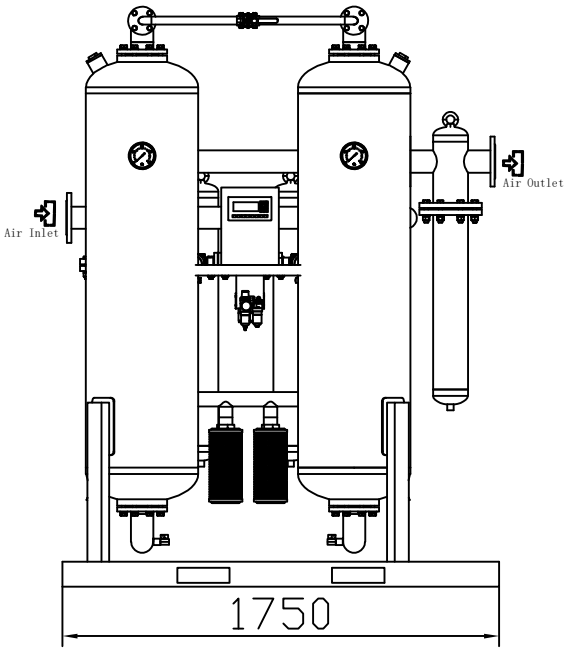

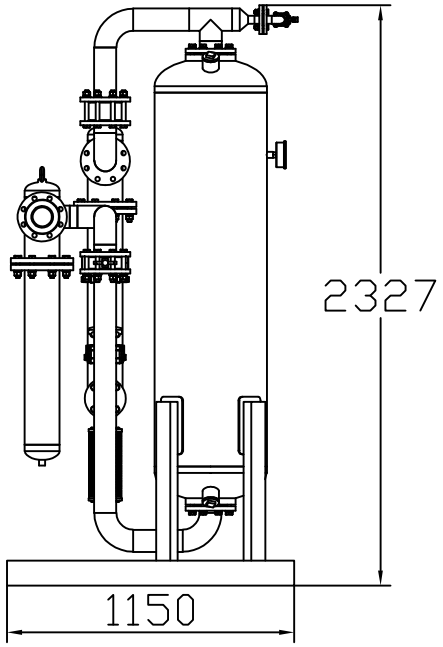

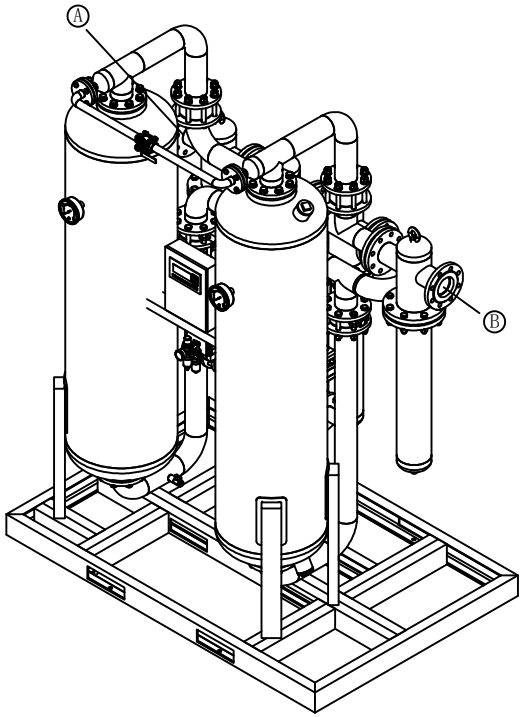

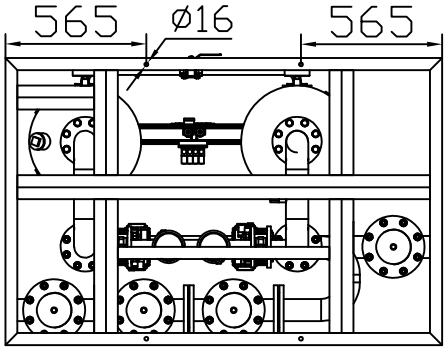

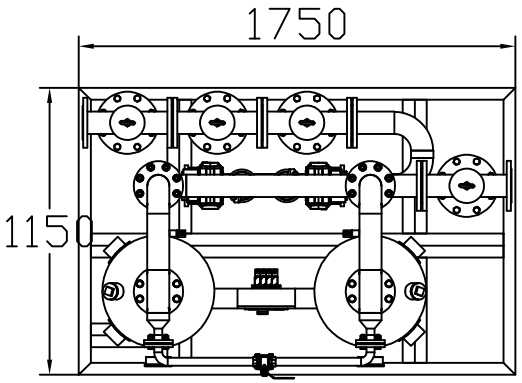

1、This equipment is suitable for indoor installation without/(with) foundation;
2、For easy maintenance,
this equipment should be kept at least 1m away from other equipment or buildings;

Nozzle List				
No.	Size	Standard	Details	Description
A	DN80	HG/T 20592	PL80(B)-16RF	Air Inlet
B	DN80	HG/T 20592	PL80(B)-16RF	Air Outlet

Technical Notes:
1. The dimensions shown in this drawing may vary in actual production;
the actual product shall prevail.